

Warnock Hersey Listing Label

- Facsimile -



MODEL M3600 M4200 M4600
**Ventless Firebox Enclosure for Gas-Fired
 Decorative Type Unvented Room Heaters**




WH -

TESTED TO ANSI Z21.91.-2007. May be installed at zero clearance to combustibles from floor, sides, rear, and top. Combustible mantles must be at least 12 inches above opening top. Decorative facing in contact with opening front must be non-combustible material. Fireplace screens or equivalent means designed to prevent unintentional access into the firebox interior, must be provided. For use with listed ANSI Z21.11.2 unvented decorative room heaters not to exceed 40,000 Btu/hr (11 723 W).

WARNING: DO NOT BUILD A FIRE IN THIS ENCLOSURE-INSTALL ONLY ANSI Z223.1. LISTED UNVENTED GAS-FIRED APPLIANCES IN ACCORDANCE WITH THE INSTALLATION INSTRUCTIONS PROVIDED WITH THIS ACCESSORY AND THE GAS APPLIANCE.

A Product of Earthcore Industries, Jacksonville, Florida

Assembled Firebox & Smoke Dome Dimensions

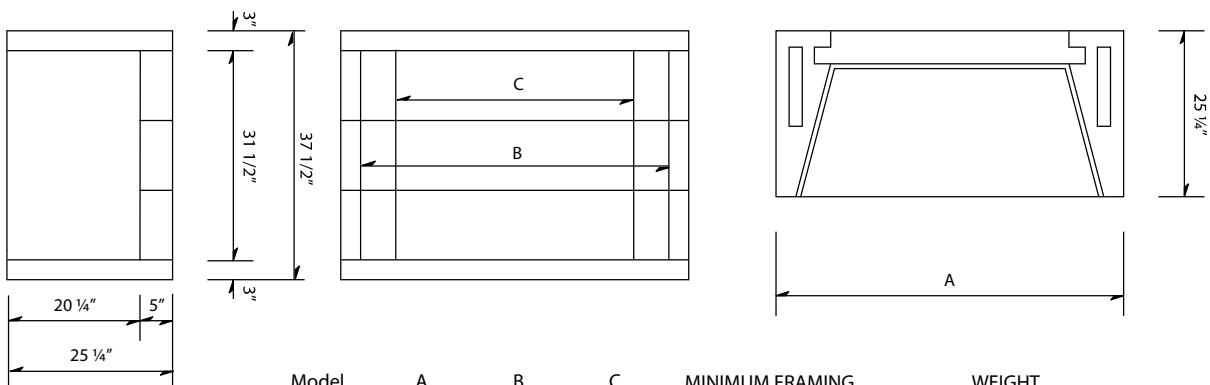

Model	A	B	C	MINIMUM FRAMING	WEIGHT
36"	43"	36 1/8"	27 1/4"	(43"W)x(37 1/2"H)x(25 1/4"D)	715 lbs
42"	49"	43 1/8"	33 1/4"	(49"W)x(37 1/2"H)x(25 1/4"D)	820 lbs
46"	53"	47 1/8"	37 1/4"	(53"W)x(37 1/2"H)x(25 1/4"D)	880 lbs